

Fresh Freestanding Bath Tap with Shower

INSTALLATION INSTRUCTION FLOOR-STANDING SHOWER / BATH MIXER


*ACCESSORIES CHECKING

LIST OF THE STANDARD ACCESSORIES

Please double check the accessory list here in after and contact us for any inconformity.

Remarks

1. Without affecting their performance accessories may be changed without further notice.
2. Drawings for reference only. Product size and shape refer to actual faucet.

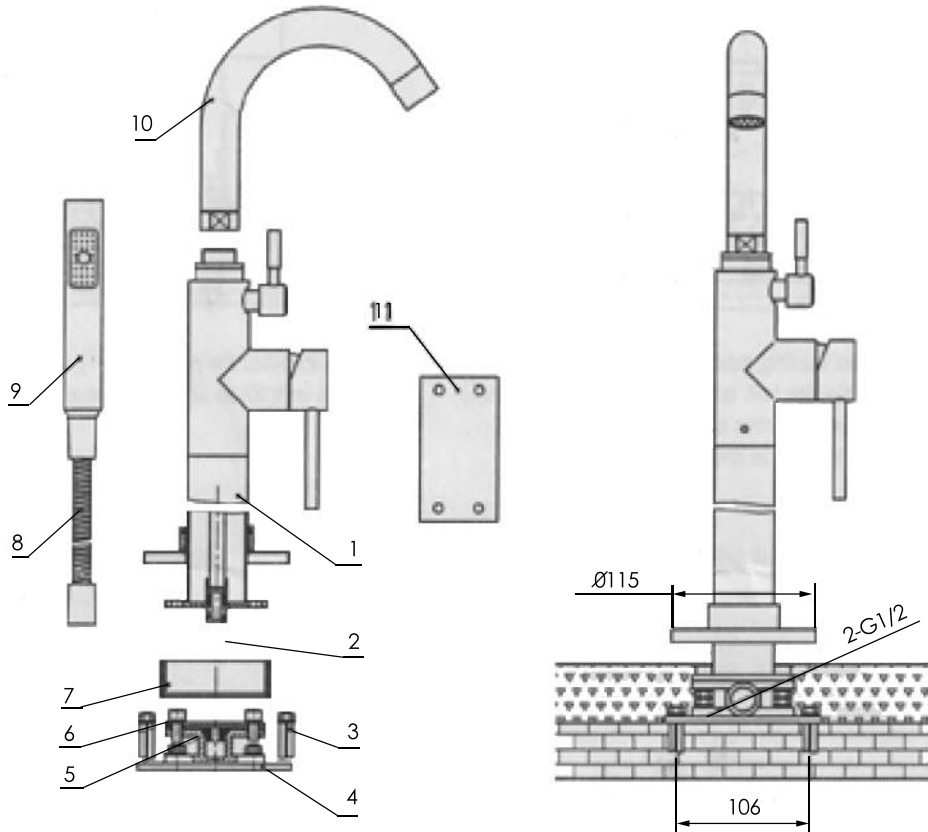

Accessory list	Qty
1. Main body	1
2. Washer	2
3. Explosive screw	4
4. connection seat	1
5. Taper gasket	2
6. Protective board	1
7. Plastic guard	1
8. Flexible hose	1
9. Handle shower	1
10. Out pipe unit	1
11. Template	1

* installation instructions


Do not disassemble the main body as it has been installed and commissioned correctly before leaving the factory.

To avoid the faucet from jamming, do flush the water pipe before installation.

After installation, make sure every joint is safely sealed and no leaking.




Using condition: working pressure at 0.05-1.0MPa (including cold and hot water pressure) with applicable water temperature: 4-90°C

Make sure to connect the hot / cold inlet pipe correctly, if standing in front, hot water pipe connecting to the left and cold water pipe connecting to the right.

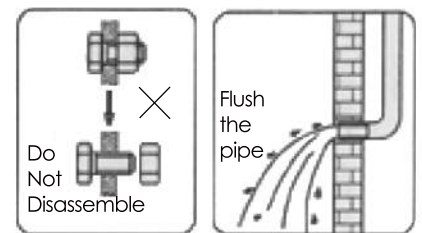


* Installation steps:

installation of main body of the faucet

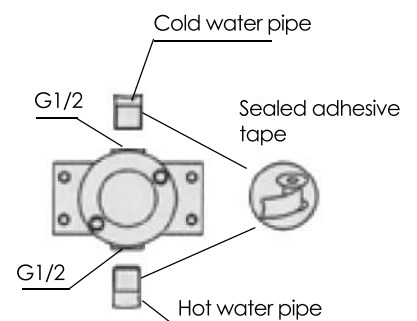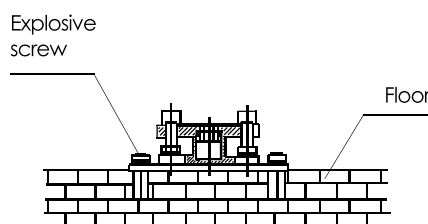


Fresh Freestanding Bath Tap with Shower


1. As shown on the Fig, first ascertain the position by means of the template (11), and drill 4 - Ø8 holes (deeper than 60mm)

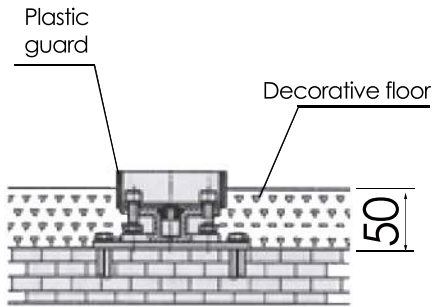

2. Take away the template(11), aim at the hole of the connection seat (4) to the pre-drilled hole. Drive in 4 Explosive drawing (3), then fix the connection seat (4) on the floor.

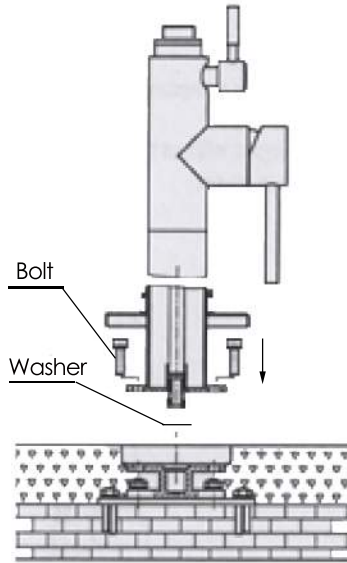


3. Stick the sealed adhesive tape on the end of water pipe and connect the settled water pipes with the connection seat (4)(Hot water pipe must be on the left).

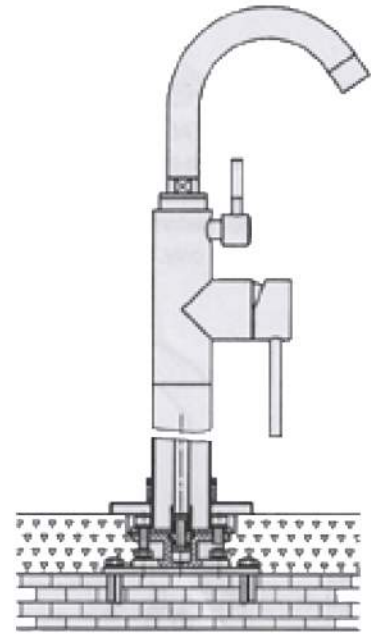

4. After connecting the water pipe with the connection seat (4), make the water trial while turn on the switch. Sheath the connection seat (4) to the plastic guard (4) after make sure to be without leakage. Then, as shown on the above Fig, spread the decorative floor.

5. After flooring, taking away the plastic guard (7), unscrew the bolt, take away the taper gasket (5) and the protective board (6). Then install the main body (1) as shown on the Fig.

6. After installed the main body (1), install the out pipe unit (10) as shown on the above Fig.

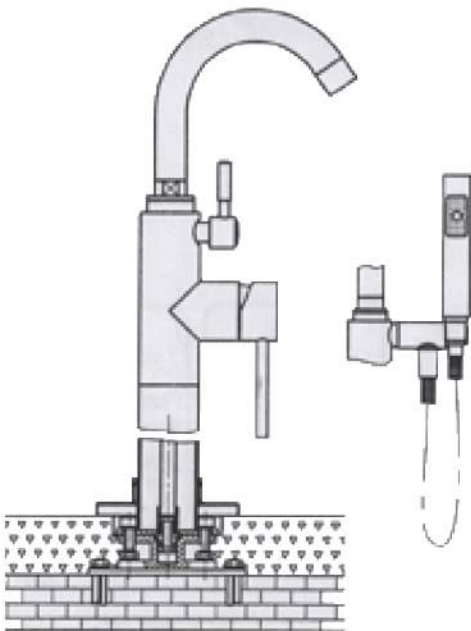

8. Water testing and clean the faucet: When all the installation is completed, please put through water and clear the dirty things left in the faucet and pipes, and effect water testing. Suggest that take apart handle shower before the first putting through water, then clean the faucet and reassemble back to effect water testing. When effecting water testing, the leakage are not allowed in every joints. Please check the following Usage for reference.

7. Connect the flexible hose (8) and handle shower (9) with the main body assembly (1), and place the shower handle (9) on the shower hook.


USAGE:

* The usage of handle

A) Raise the handle to make the water flow out, contrarily the water flow will stop.


B) Turn the handle to the left, the hot water flow will be stronger, contrarily the temperature of the water will decrease.

Fresh Freestanding Bath Tap with Shower

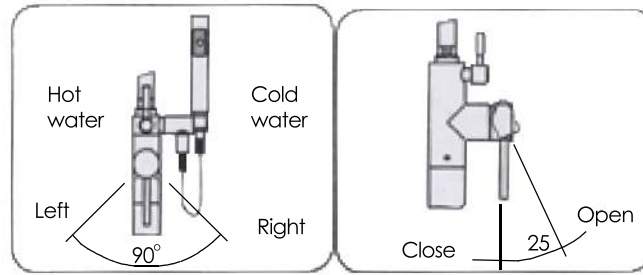

* The usage of the shower converting assembly:

When the faucet is turned on, if the handle of the shower converting assembly is on the right side, water falls from the out pipe unit, on the contrary, the water comes from the handle shower.

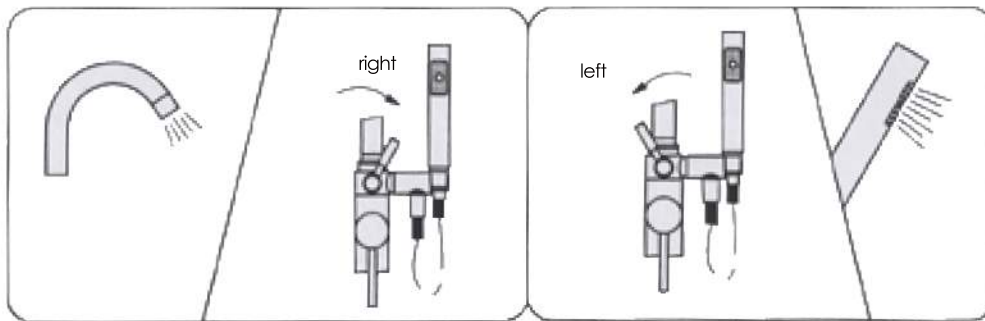

* Cleaning and Maintenance

* To keep the product clean and shining, follow the steps as below

1. Flush with clean water and dry with soft cloth only;
2. if any dirt, clean with soft liquid or transparent glass detergent.
3. Do not use any scrubbing detergent, polisher, sand-cloth, paper tissue or scraper.
4. Do not use detergent, grain like detergent or soap.

