

Contemporary Corner Sliding Door Steam Pod (SCP2)



LIVINGHOUSE.CO.UK

TEL: 01722 415000

EMAIL: SALES@LIVINGHOUSE.CO.UK

---



### **WARNING**

Before you start to assemble and install the product, carefully read through all the instructions.

The equipment may not be used by persons (including children under 8 years of age) with impaired physical, sensorial or mental capacities, or lacking the necessary experience and knowledge, unless appropriately instructed to use it or under the supervision of a person responsible for their safety.

Children must be supervised so they do not play with the equipment.

The cleaning and maintenance operations to be performed by the user must not be done by children without supervision.

Keep this manual and make it available for those who use of the product.

Children and the infirm should only use the cubicle under the supervision of an adult.

**WARNING:** Only allow children to use the appliance without supervision when adequate instructions have been given so that the child is able to use the appliance in a safe way and understands the hazards of improper use.

### **Electrical connection:**

The manufacturer certifies that the product conforms to current health and safety regulations at the time of sale and that the product has the CE-mark and Declaration of Conformity. All products and components are tested during manufacture in accordance with the relevant reference standards and company quality system procedures. In order to ensure that your manufacturer product maintains these high standards after installation and throughout its service life, please read the following instructions.

- 1) Check that the mains electrical equipment connected to cubicle conforms to current electrical standards and regulations and is fitted with a fully efficient earth connection.
- 2) Current electrical regulations forbid the installation of any electrical equipment (e.g. plugs, switches) inside a radius of 60 cm from the cubicle and at a height of 225 cm.
- 3) Check that rating of the mains power supply line matches the absorbed power specified for the cubicle (see Technical specifications).
- 4) The electrical connection between the cubicle and the mains must be protected against water spray and must have a protection rating of IP55 or higher.
- 5) The electrical equipment upstream from the cubicle must be fitted with an omnipolare 30 mA switched circuit breaker with a minimum contact opening of 3 mm, which conforms to current electrical regulations.
- 6) The manufacturer declines all responsibility for injury or damage resulting from failure to observe these instructions.

- 7) The multifunctional cubicle is suitable for continuous connection to the water mains.
- 8) The multifunctional cubicle must be connected permanently to fixed wiring.
- 9) Check the equipotential connection.
- 10) The multifunction cubicle is provided with electrical connection of the type Y, if the power cord is damaged, it must be replaced by the manufacturer or by its technical assistance service or in any case a person with similar qualification, so as to prevent any risk.
- 11) Minimum pressure of the hydraulic inlet connection 0,2 MP (2 bar) - Maximum pressure of the hydraulic inlet connection 0,5 MP (5bar).
- 12) During the installation of the multifunctional cubicle use a new set of hydraulic connections, the old ones must not be reused.



Very hot surface







equipotentiality



### PRECAUTIONS:

Integrated cubicles will provide a variety of benefits if used properly. You should observe the following precautions.




- 1) Do not exceed a maximum water temperature of 45°C.
- 2) Do not use the shower or the steam bath after a heavy meal and while you are still digesting.
- 3) Children and the infirm should only use the cubicle under the supervision of an adult.
- 4) Do not use the steam bath for longer than 20 to 30 minutes. Maximum permitted steam bath times vary with age and body weight.
- 5) Persons with serious heart problems, high blood pressure and acute illnesses should consult a medical practitioner before using the steam bath.
- 6) SCALDING HAZARD. During a steam bath, keep your feet away from the steam outlet nozzle.

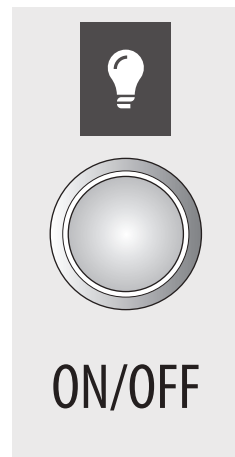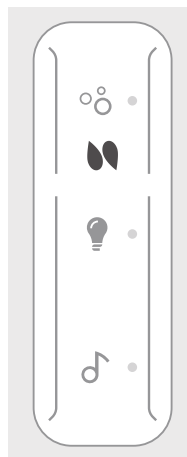


1° TAP ON




2° TAP OFF

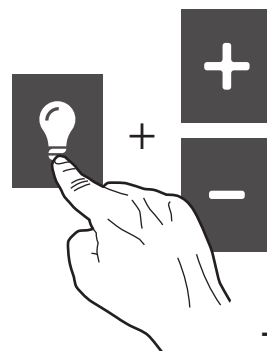


TAP ~ 2/3 sec OFF





Track1...Track2...Track3...





TAP ~ 2/3 sec OFF



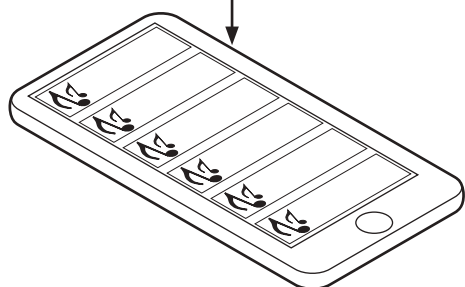


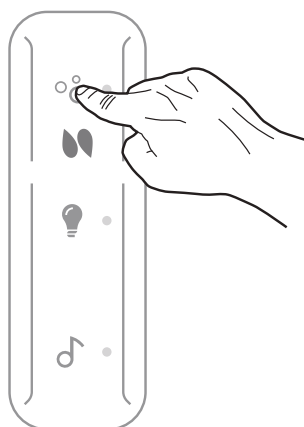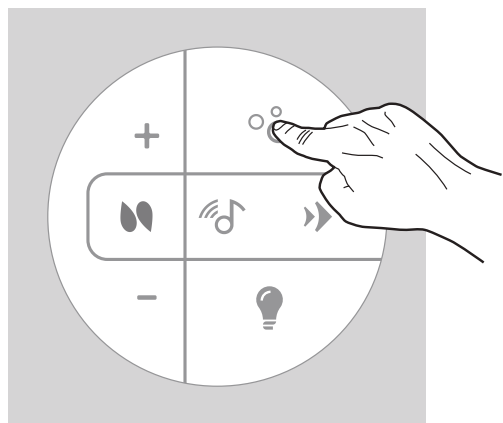







## Washing cycle



**ON**















**OFF**

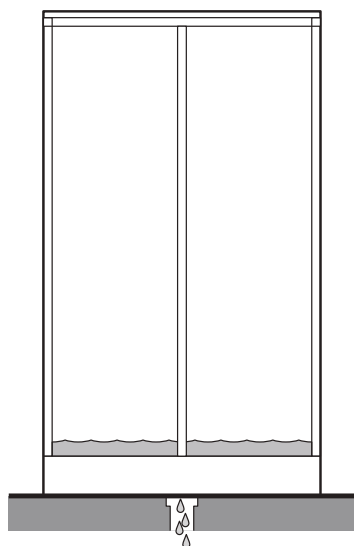








**A**

Maintenance

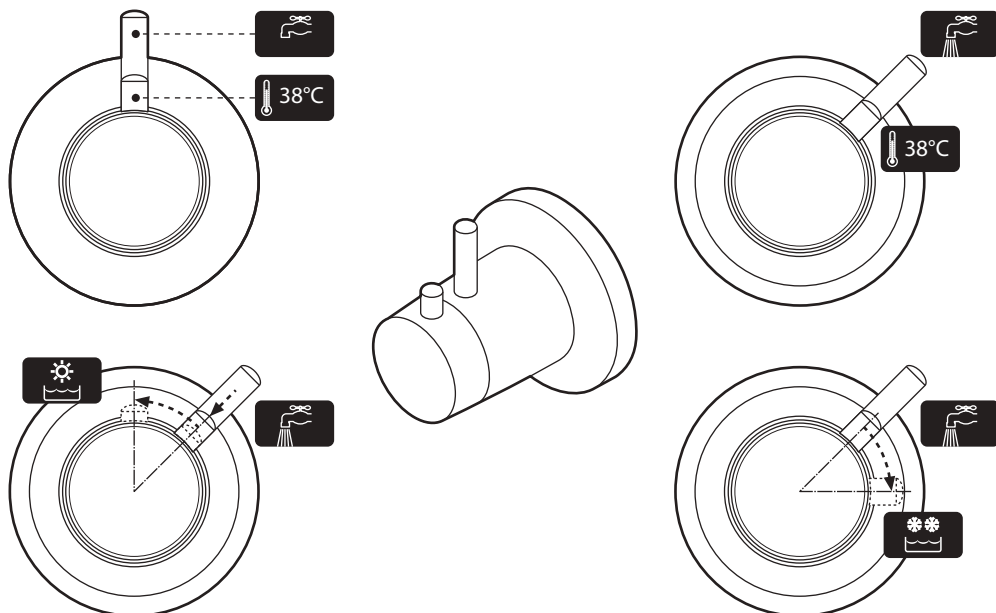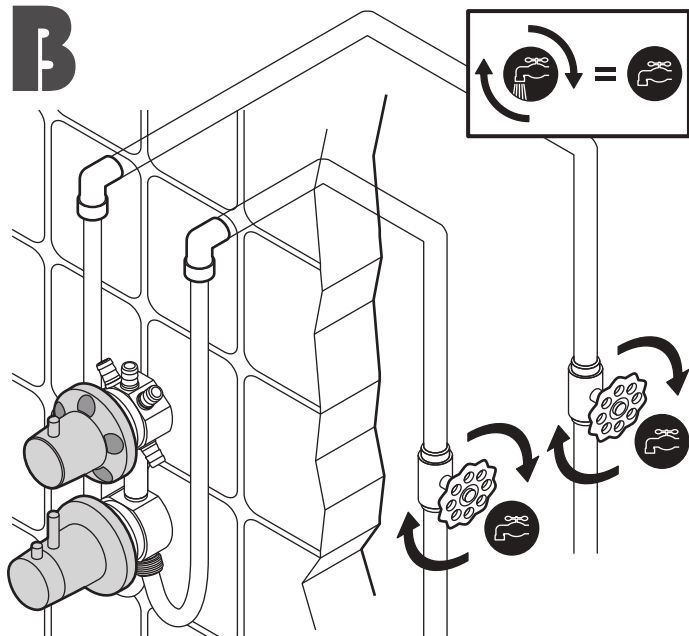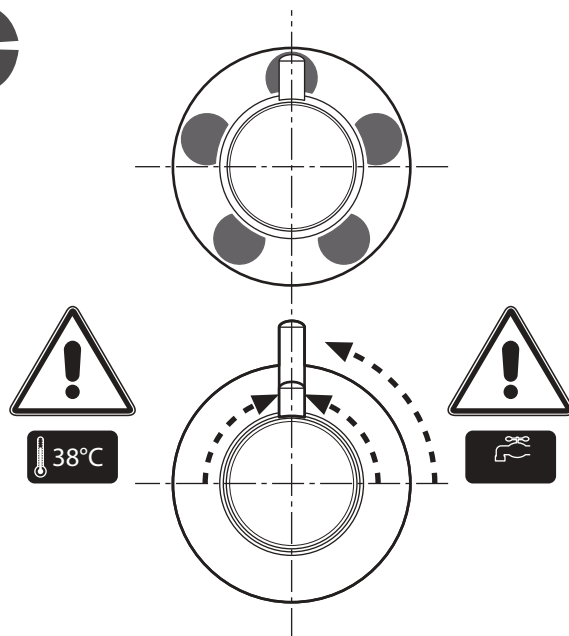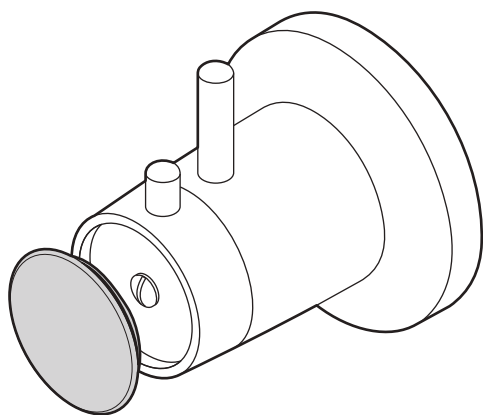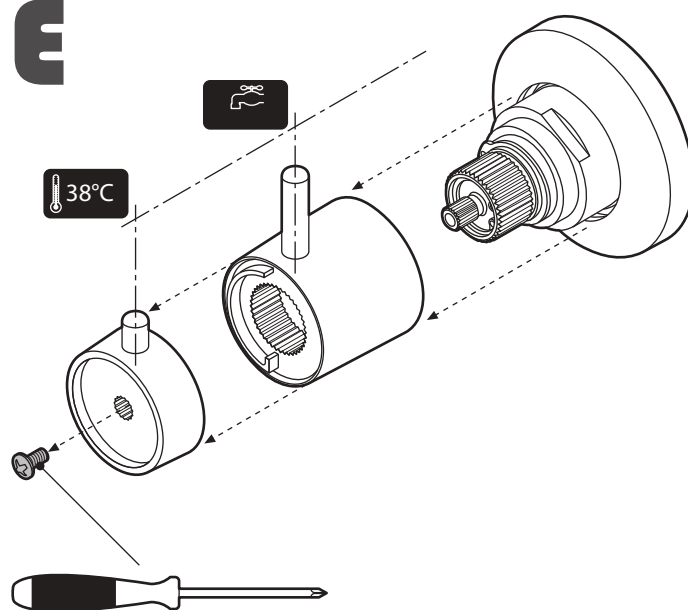**B****C****D****E**

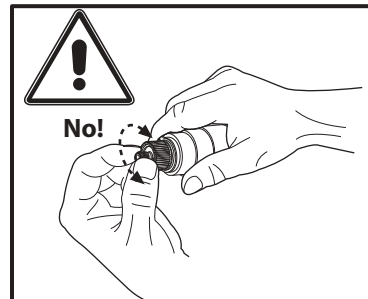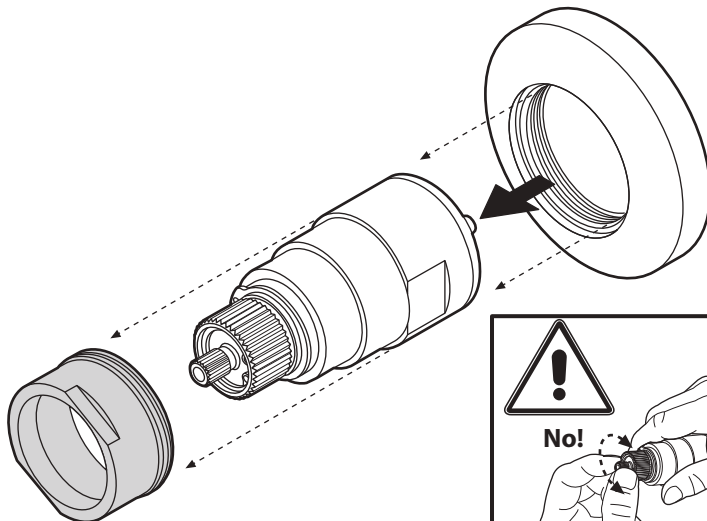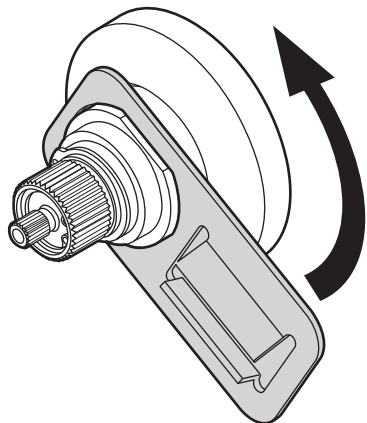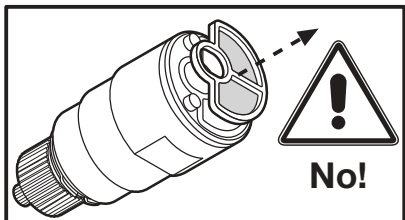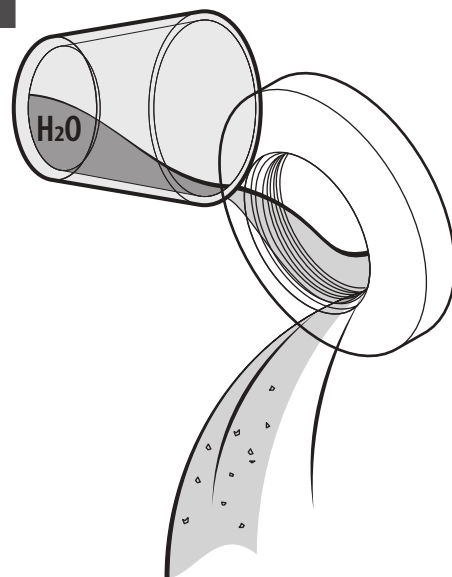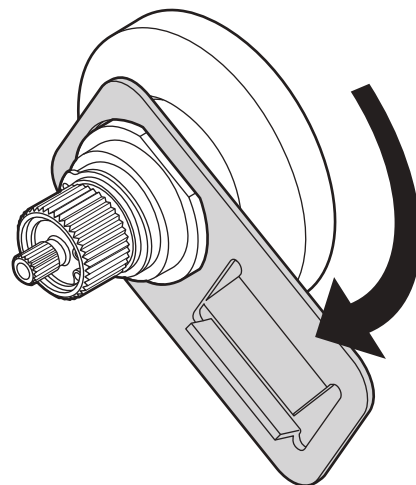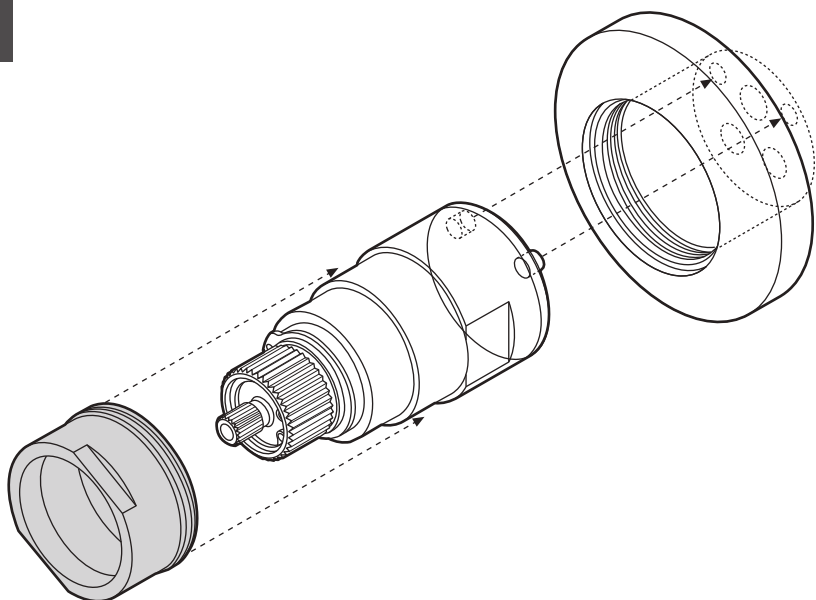
**F****G****H****I**

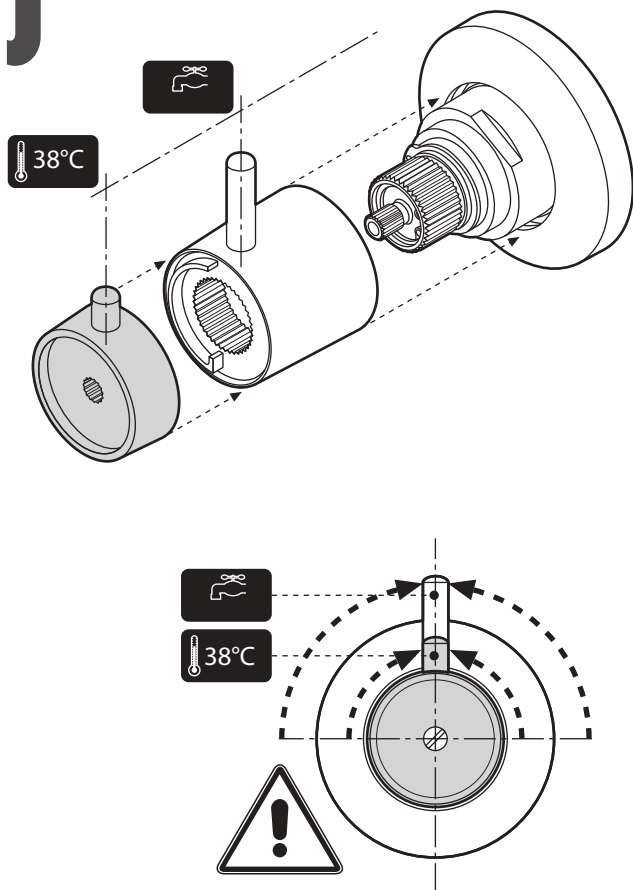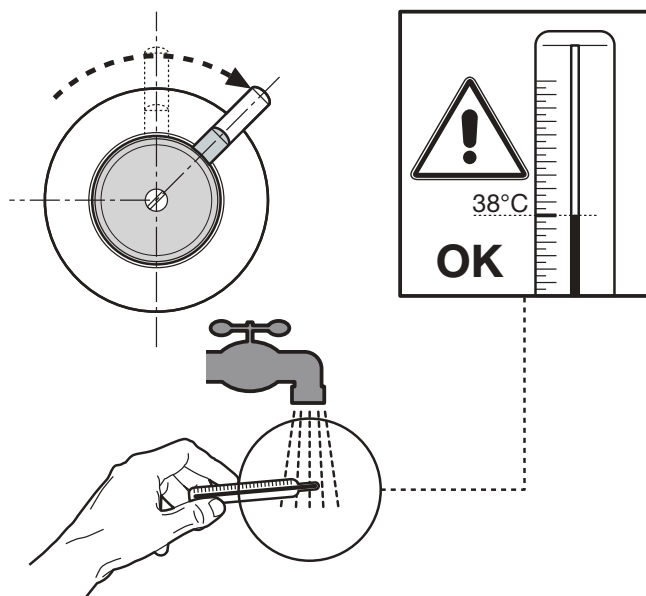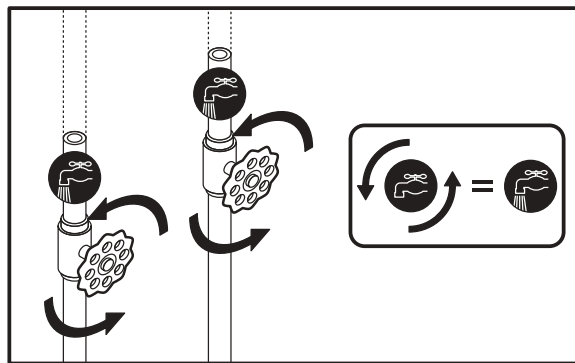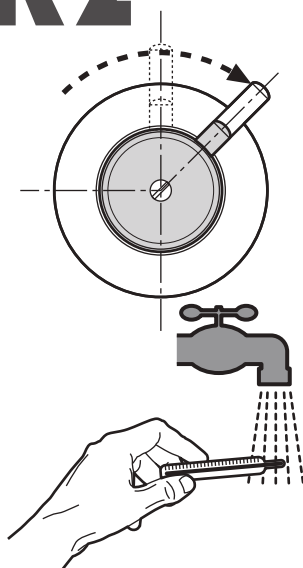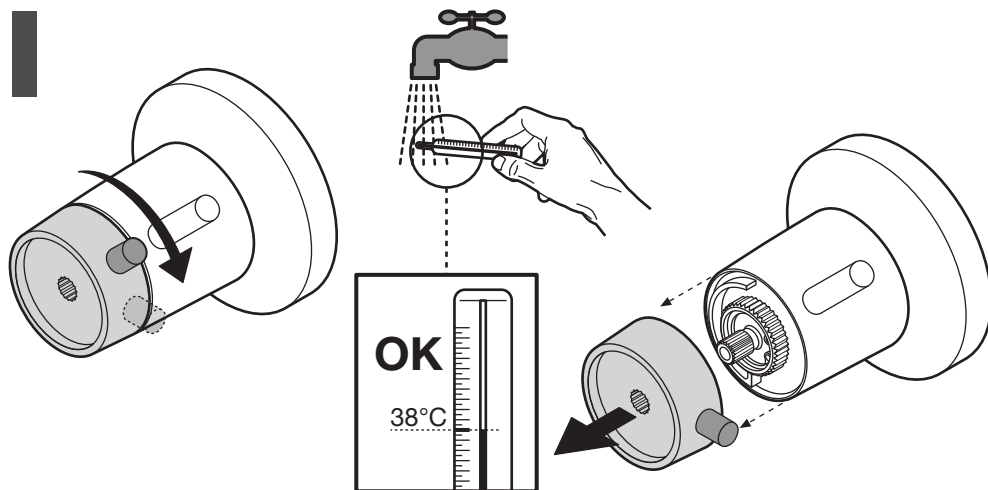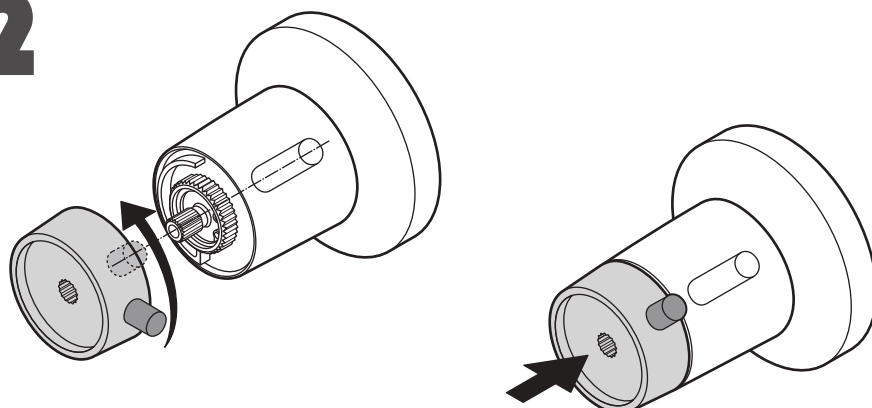


**J****KI****K2****I****2**




# K3

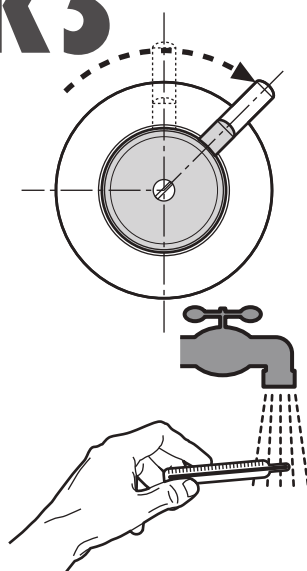


# 1

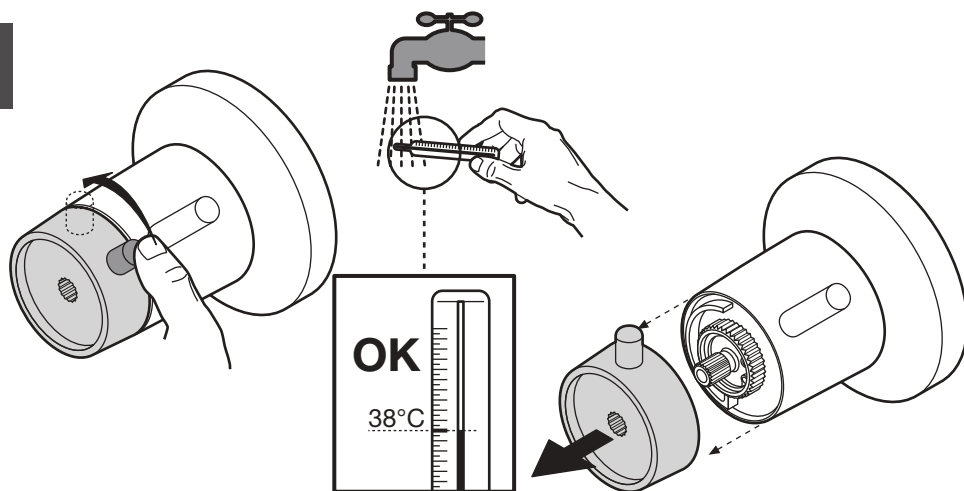


# 2

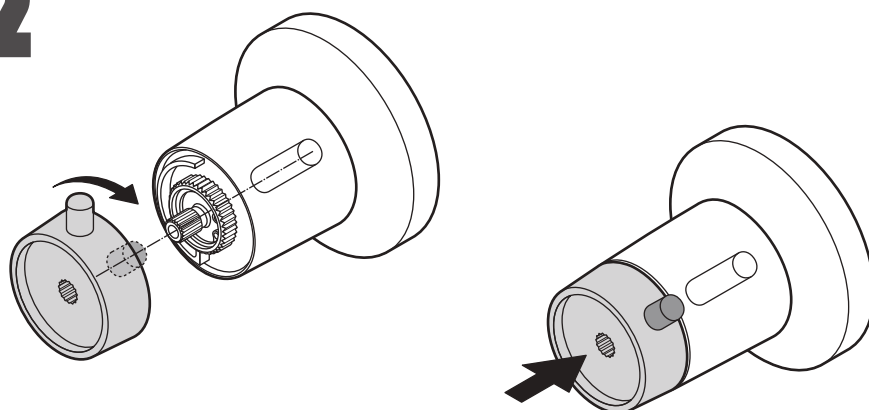










# l

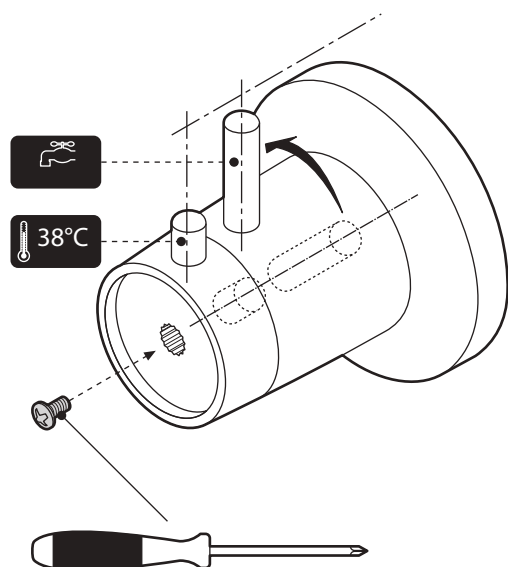

# m

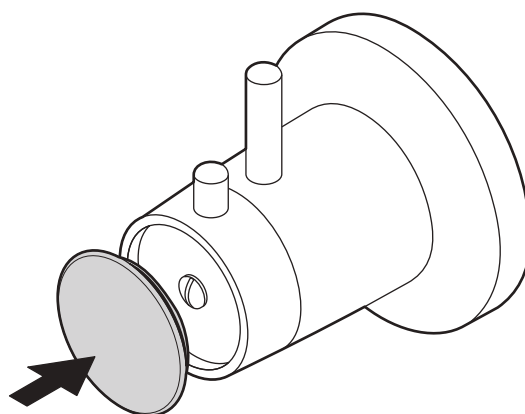

Boiler water filter – Clean periodically

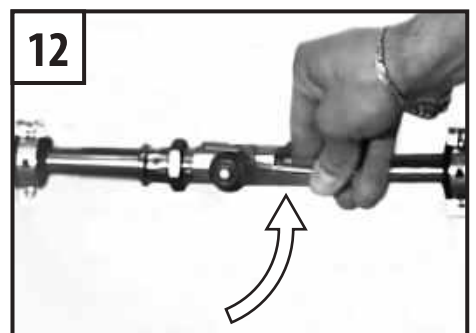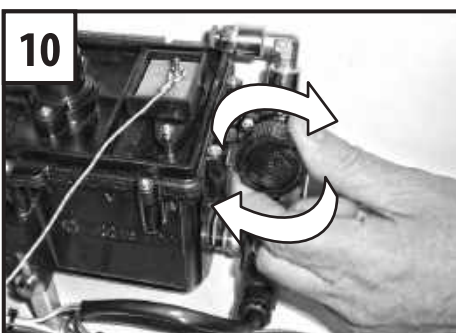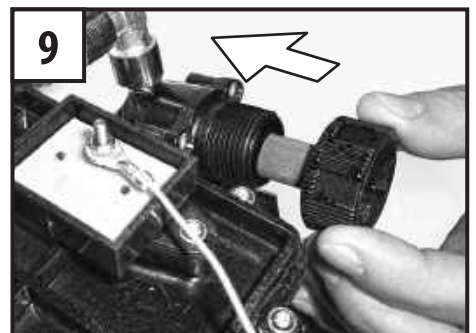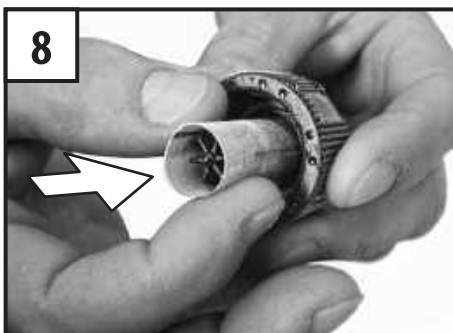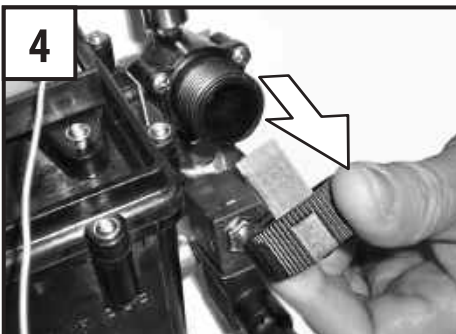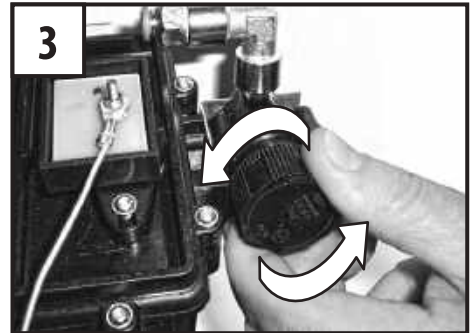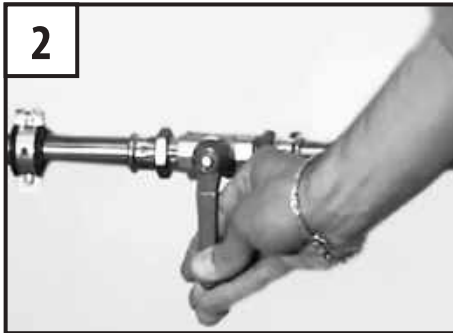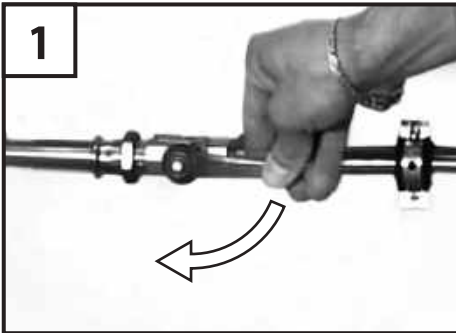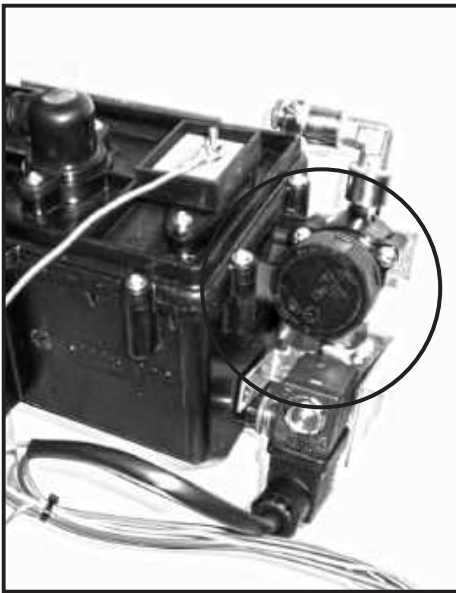

# PRODUCT GUARANTEE:

All products purchased by consumers, as defined in Article 3 of the Consumer Code (Legislative Decree no. 206 of 6 September 2005 and subsequent amendments), are covered by the legal guarantee of the seller under Article 128 and subsequent amendments of the consumer Code. In case of lack of conformity of the product, we invite the consumer to contact their dealer within the statutory deadline.

# WATER TREATMENT

- The hardness of the domestic water supply affects the operation and the cleaning frequency of the thermostatic mixer.
- In case of water with hardness above 15°f an antiscald device is recommended. The choice of device should be made according to the characteristics of the water supply.

 **This symbol indicates important product instructions or important safety information.**

# IMPORTANT:

Before you start to assemble and install the product, carefully read through all the instructions. Unpack the components and check that nothing is missing and that there are no damaged or faulty components, remove the transparent protective film. Before you install the shower cubicle in its final position, perform a test run. Run the unit for several minutes and check for water leaks and any damage caused during transport and handling. This product should be installed by suitably skilled personnel.

N.B.: This product is designed for installation on finished walls and floors.

Warranty claims must be produced with the purchase invoice and the product assembling instructions.

The drawings and illustrations in this manual are provided for information purposes only.

The manufacturer reserves the right to make changes and improvements without prior notice.

# Dismantling the shower valves:

In the event of the formation of lime scale and a resulting malfunctioning of the shower valves, dismantle the parts (fig. A/B/C...). We recommend you immerse the cartridge in normal vinegar until it is completely lime scale-free.

To ensure correct operation of the thermostatic mixer, the unit must be supplied from a boiler or a water heater providing 6 to 7 litres per minute of water at a temperature of 60/65°C.

# INSTRUCTIONS FOR USE:

**electrocution Hazard. Do not use electrical equipment of any type inside the shower enclosure when the shower is operating.**

# Massage functions:

## FIXED SHOWER HEAD.

**HYDRO-BODY:** for a total body massage concentrating on the spinal column. Relieves back pain, tiredness and muscular aches. Ideal for reducing physical stress.

# CLEANING THE SHOWER UNIT:

## CARING FOR YOUR CUBICLE

The cubicle panels are made with acrylic parts and must be cleaned using a liquid detergent and a soft cloth or sponge. Use a good quality household liquid detergent. To prevent scale deposits, wipe dry using a chammy leather or a soft lint-free cloth that removes stubborn deposits without leaving traces. Limescale deposits may be removed using specific detergent products. To restore shine to the acrylic surface polish with an ordinary wax polish such as car wax.

DO NOT USE ABRASIVE CLEANERS, ALCOHOL OR ALCOHOL BASED PRODUCTS, ACETONE OR OTHER SOLVENTS.

# TROUBLESHOOTING:

Before calling the Service Centre, check that:

- The hoses are properly connected and not kinked.

- Hot and cold water is being correctly delivered to the wall fittings.
- The water supply system was bled before the shower unit was installed.

# WASTE DISPOSAL:

For the disposal of the product or its parts, follow the local regulations on matters of waste disposal. For Italy, Legislative Decree n. 152 of April 3, 2006 will hold, and for the other EU countries, Directive 2008/98/EC.

# ROHS DECLARATION:

Livinghouse S.p.a. declares that the item conforms with the European ROHS directives and was manufactured in conformity with the European Directive 2011/65/UE - EN50581, and that the maximum concentration allowed for the following substances have been fully complied to.

- Mercury (Hg), 0.1% max.
- Cadmium (Cd), 0.01% max.
- Lead (Pb), 0.1% max.
- Chromium VI (hexavalent chromium) (Cr(VI)), 0.1% max.
- PBB (polybrominated biphenyls), 0.1% max.
- PBDE (Polybrominated diphenyl ether), 0.1% max.

# EC DECLARATION OF CONFORMITY:

The manufacturer declares under its responsibility that the cubicle fitted with steam generator mod. S 300 conforms with the following European directives 2014/35/EU-2014/30/EU-2014/53/EU and EU regulation 305/2011 and subsequent amendments, with reference to harmonized standards:

EN55014-1  
EN55014-2  
EN60335-1  
EN60335-2-105  
EN61000-3-2  
EN61000-3-3  
EN62479  
EN301 489-17 V3.2.0  
EN301 489-17 V2.2.0  
EN300 328 V2.1.1  
EN15200



The Bluetooth brands are the property of Bluetooth SIG, Inc.



Modèle: UNITÉ DE COMMANDE ÉLECTRONIQUE 40600ELE

Calibrage: 20 VA 220 V-230 V 50/60 Hz

Plage de températures: 0 à 70 °C





Modèle: UNITÉ DE COMMANDE ÉLECTRONIQUE 40599ELE

Calibrage: 20 VA 220 V-230 V 50/60 Hz

Plage de températures: 0 à 70 °C



Modèle: UNITÉ DE COMMANDE ÉLECTRONIQUE 40584ELE

Calibrage: 30 VA 220 V-230 V 50/60 Hz

Plage de températures: 0 à 70 °C

Plage de fréquences RF: 2,4 à 2,4835 GHz

Puissance RF: 20 dBm



[illegible]



LIVINGHOUSE.CO.UK

TEL: 01722 415000

EMAIL: SALES@LIVINGHOUSE.CO.UK

---