


# Technical Sheet SLIMLINE CISTERNS FOR BACK TO WALL TOILETS (52E)

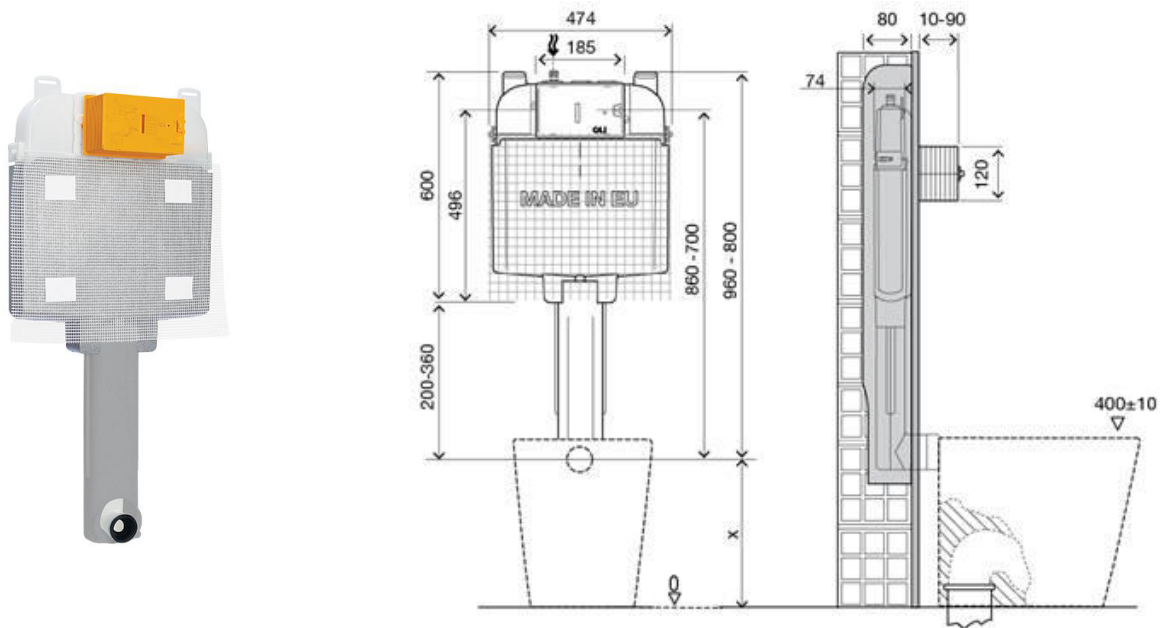

## Definition and Application

- Flush cistern to be installed inside the wall and used in combination with floor standing sanitary applications
- Compatible with all floor mounted WC pans

## Technical Features

- Dual flush in-wall cistern compatible with either dual or single flush actuators 6/3 litres
- Mechanic actuation
- 80mm thickness
- Working pressure from 0,1 to 16 bar
- Resistance to atmospheric humidity (Hr <90%).
- Polypropylene (PP) cistern highly resistant and inalterable to thermal stress
- Other versions compliant with WRAS/NF/SAI-WATERMARK/UPC/KIWA standards
- EN 14055 marking CL1
- Equipped with Azor Plus Inlet Valves, with delayed refilling (saves up to 9 litres of water per day) and silent according to the NF standard category Class I
- Supplied with anti-condensation lining
- "A" class for the Water Efficiency in compliance with the ANQIP Authority requirements

Millimetres measures

# Technical Sheet

## Accessories

- 1 Discharge pipe ø 56 x 360
- 1 Seal for discharge pipe ø 40/45
- 1 Protective box
- 1 G ½" stop valve
- 1 Protection sponge for the stop valve
- 2 Metal plates for fixation
- 1 Discharge pipe protection cover in EPS
- 

## Fixing accessories for metal plates

- 2 Screws ZN M5x16
- 2 Washers ZN M5
- 2 Nuts M5

## Warranty

Ten (10) years warranty against manufacturing defects according to the general selling terms.

Starting from the purchase date of the product (excludes perishable parts).

If the product is not correctly installed the warranty is not valid