

Clear Cube Shower Enclosure (69F)

Size Options available

Width

1000 - 1700mm

Depth

800 - 1200mm

Bespoke sizes available to special order


Special finishes available to special order











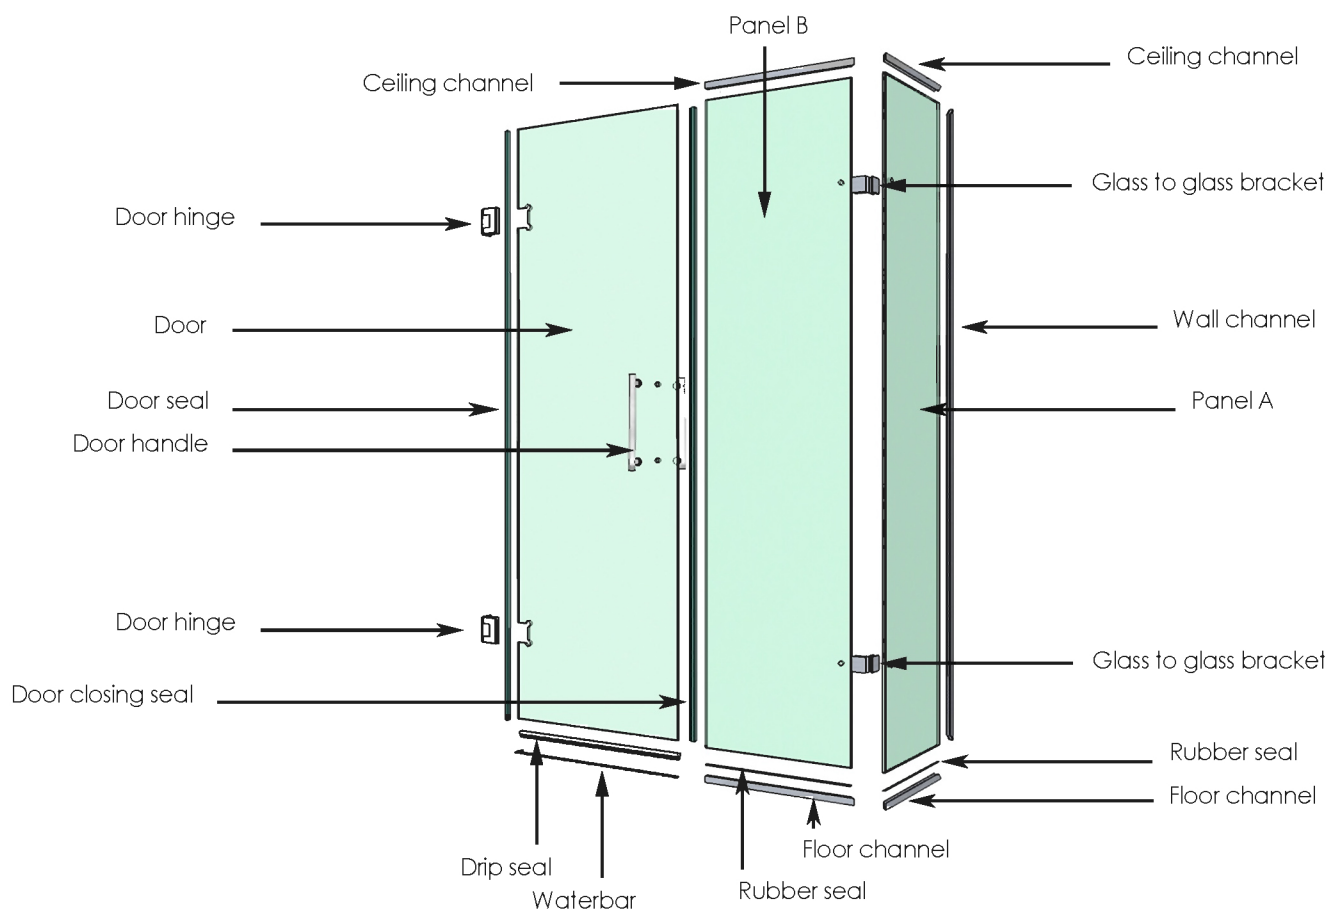

For more information please contact Livinghouse

Email: sales@livinghouse.co.uk

Tel: 01722 415000


Fax: 01722 414816



	10mm glass panel x 3		Water bar
	Door hinges x 2		Drip seal
	Door handle		Door seal
	Wall channel		Door closing seal
	Floor channel x 2		Glass to glass brackets x 2
	Ceiling channel x 2		
	Rubber seal x 2		





		<p>step 1</p> <p>The enclosure relies on level walls and floors to be able to install correctly as there are minimal tolerances between glass to glass panels.</p> <p>Ensure the shower tray / floor and walls are perfectly horizontal and vertical.</p>
		<p>step 2</p> <p>Dry fit the channelling for panel A using a double sided tape for the floor and ceiling and screws for the wall.</p> <p>Ensure wall channelling is vertical</p> <p>The wall channelling will require cutting to the correct height with mitred corners.</p> <p>Do not cut the floor and ceiling channels to length for panel A at this point.</p>
		<p>step 3</p> <p>As a guide the wall channel will have a wall to centre measurement of door width + panel B width + 16mm.</p> <p>Please note the above dimensions are a guide only. Always dry fit to confirm final dimensions.</p> <p>*Please see notes</p> <p>Dry fit panel A into the channelling, do not use silicone at this point to secure glass panel.</p>
		<p>step 4</p> <p>Mark the floor and ceiling channels for panel A at the required lengths.</p> <p>Mitred cuts will be required for both channels.</p> <p>Remove panel A and cut the channels as marked.</p> <p>Dry fit the floor and ceiling channels as before.</p>
		<p>step 5</p> <p>Dry fit panel A into the cut to length channels.</p> <p>Mitre the floor and ceiling channels for panel B leaving the channelling longer than required.</p> <p>Using a double sided tape, dry fit the mitred channels so they are tight to the mitred ends of the panel A channelling.</p>
		<p>step 6</p> <p>Dry fit panel B into the mitred channelling.</p> <p>Secure panel B to Panel A using the 2 glass to glass brackets supplied</p> <p>Mark the mitred channelling for panel B at the required lengths.</p>




step 7

Remove panel B from the channels.
Cut the channels to the required length.
Dry fit the floor and ceiling channels for panel B as before.
Dry fit Panel B into the cut to length channels.
Secure panel B to Panel A using the 2 glass to glass brackets
Do not use silicone at this point.

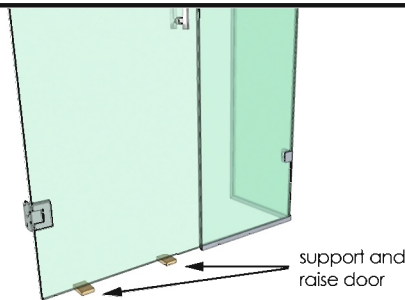


step 8

Fit supplied hinges to the door.
Ensure hinges are tightened sufficiently.
Fit supplied handle to the door.
Position the door against the wall with the hinges in their closed position.
Raise the door by approx 12mm using blocks. (blocks not supplied).
Use a level to ensure the door is vertical.


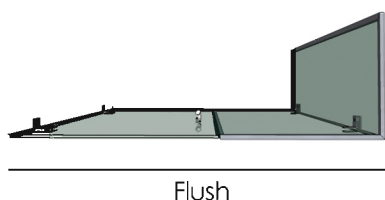


Gap of 2-5mm



step 9

Ensure that the door in its natural closed position is not proud of panel B as the enclosure will rely on the doors self centring hinges to close onto the supplied door closing seal to form a water tight finish.
A gap of between 2-5mm should be expected between the door and panel B to allow for the fitting of the door closing seal.





step 10

Once the final door position has been determined, mark all screw hole positions on the wall.
Remove the door and install suitable wall fixings to the marked screw holes. (wall fixings not supplied).



***Please see notes**

Fit the door to the installed wall fixings.

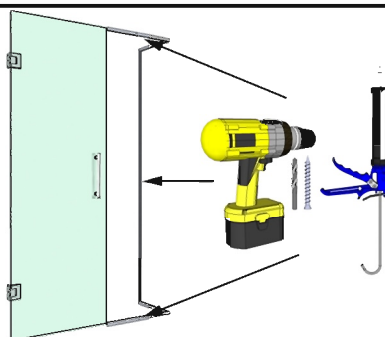

step 11

Once final glass panel positions have been confirmed remove panels A and B.
Mark final channel positions and secure to the floor, wall and ceiling using suitable fixings.

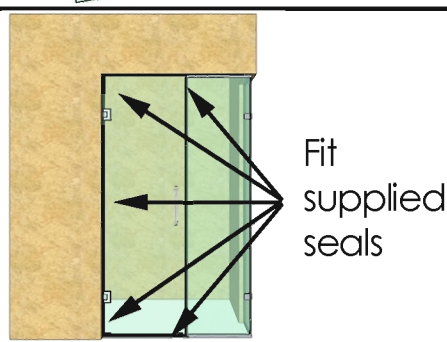

step 12

Once the channels have been installed silicone panels A and B into the channelling and fit the 2 glass to glass brackets.
Fit the seals to the door and panel B as required.
Fit the water bar to your shower base
***Please see notes**



Please note:

The enclosure fitting instructions are assuming all walls and floor and vertical / horizontal.

The wall channel measurement of 16mm is based on the following guides,
8mm width (hinge allowance) + 3mm width (door closing seal allowance) + 5mm width (channel width centre)

A gasket is supplied to be fitted within the floor channelling to cushion the glass to metal contact.

The enclosure is reversible so that the door / fixed panels can be either left / right hand hung.

Due to the amount of various wall constructions and screw fixings available, no screws or screw fixings are supplied with this panel. Please use suitable fixings to suit your requirements.




Width adjustment for the Uber enclosure is minimal so it is very important that all final glass panel positions are determined before the final fixing.

Use a good quality silicone for the securing the channels /panels and the water bar. Silicone is not supplied.

It is recommended that the glass panels are moved and fitted using appropriate glass suction handles which should be available from good hardware stores.


The water bar should be used in order to form a watertight seal under the door. The bar can be cut from either end to suit and can be fitted in a number of ways (please see below for suggestions).

A Silicone bead maybe required to seal between glass panels

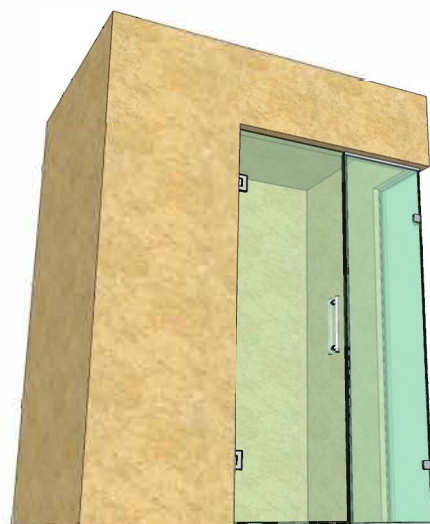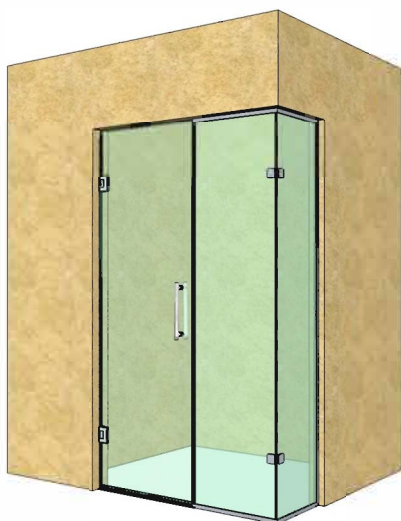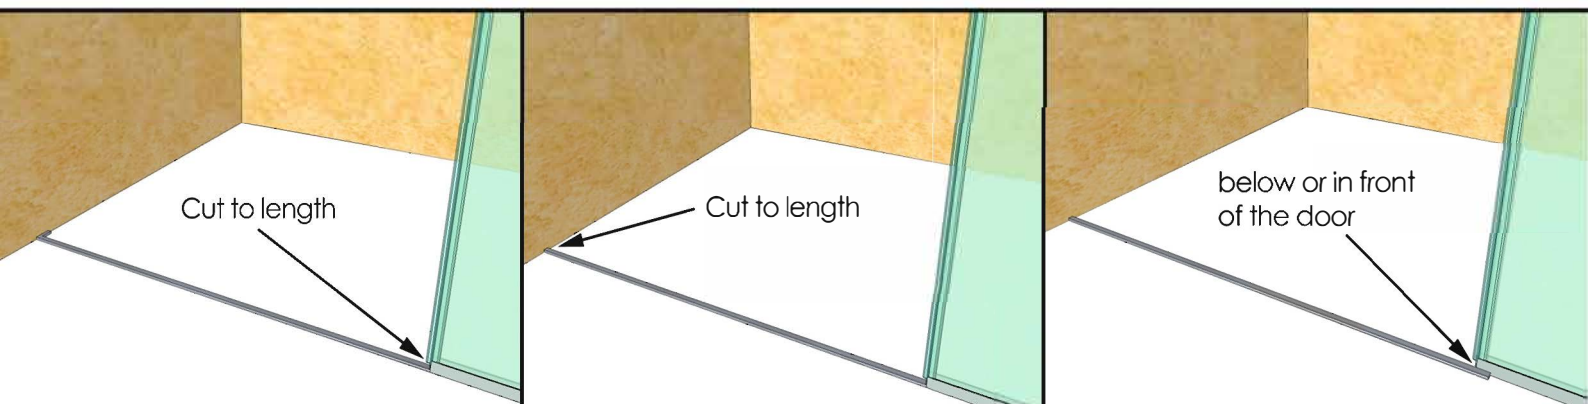



Suggested seal fitment for the corner.

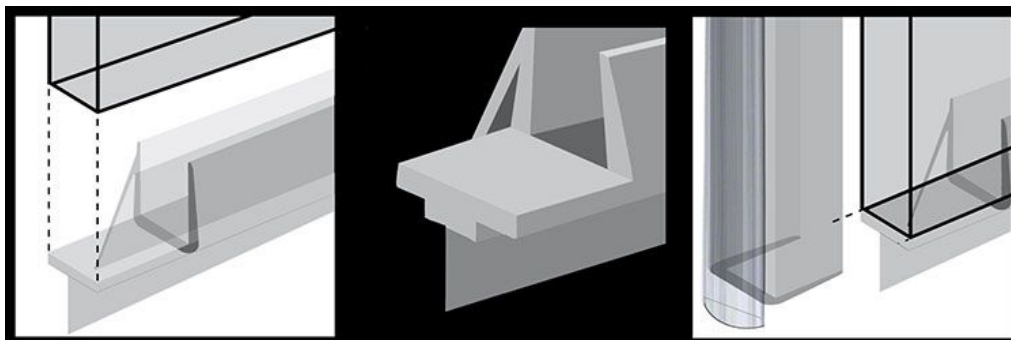

Handy videos

Adjustment of hinges if required.

Scan the QR code for video instructions on hinge installation and adjustment.



Door Handle

Scan the QR code for video instructions on handle installation.

