

The Cove walk in enclosure in 10mm glass


Size Options available

870mm
970mm
1170mm
1370mm

Bespoke sizes available to special order
Special finishes available to special order

For more information please contact Livinghouse

Email: sales@livinghouse.co.uk
Tel: 01722 415000
Fax: 01722 414816

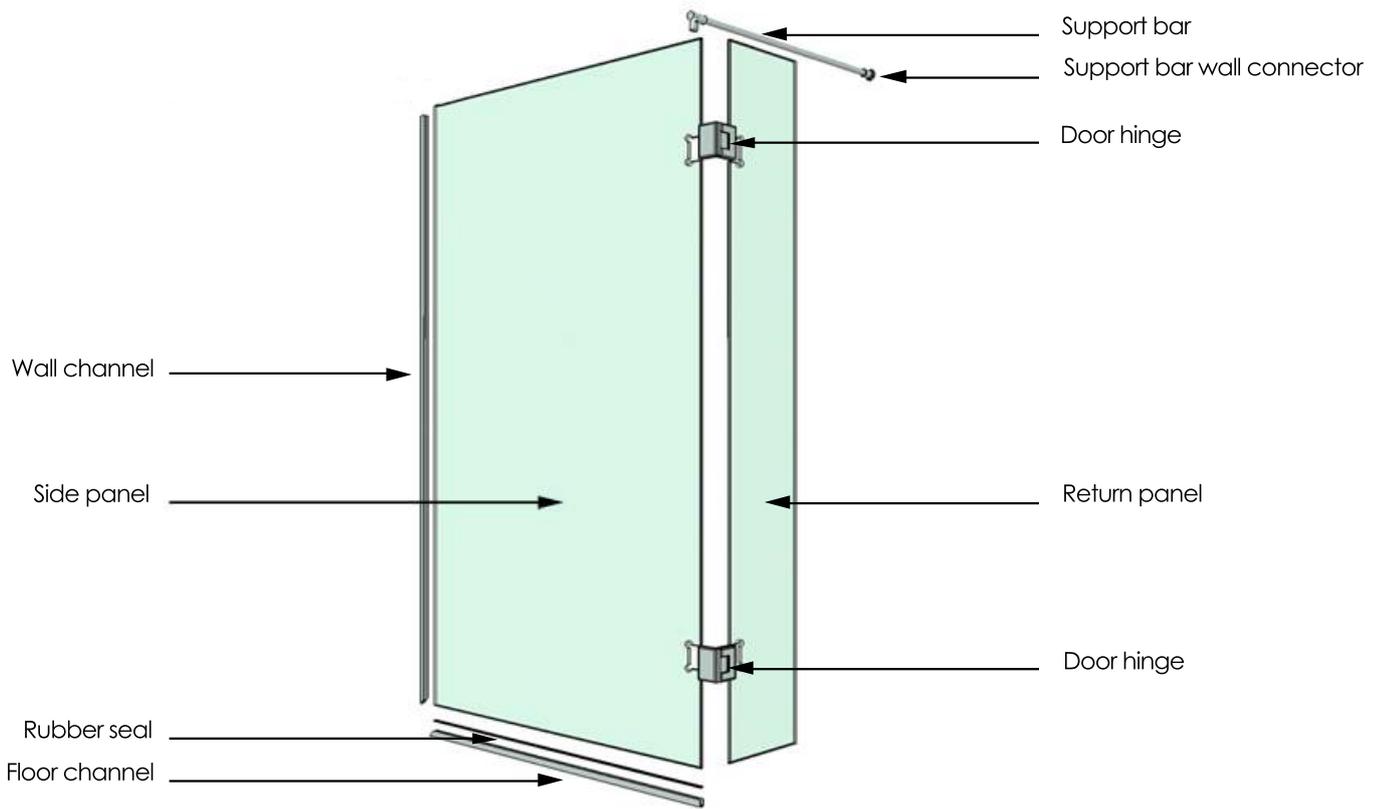

	10mm side panel		Support bar
	10mm return panel		Support bar wall connector
	Door hinges x 2		
	Wall channel (Surface) Recessed available on request		
	Floor channel (Surface) Recessed available on request		
	Rubber seal		



		<p>step 1 Dry fit the channelling for the wall and floor for the side panel using a double sided tape for the floor and screws for the wall. Ensure wall channelling is vertical The channling is supplied longer than required. Do not cut channels to length at this point. Fit the side panel into the channelling.</p>
		<p>step 2 Fit supplied hinges to the return panel. Ensure hinges are tightened sufficiently. Poistion the return panel at 90 degrees to the side panel and raise to the correct height using blocks. (block not supplied)</p>
		<p>step 3 Fix the return panel to the side panel making sure that it is supported underneath. Once the final panel positions have been determined, mark the floor channel at the required length. Mark the wall channel at the required height</p>
		<p>step 4 Remove the panels from the channelling. Cut the channelling as marked. Secure the wall and floor channels using silicone and counter sinking screws for the wall channelling.</p>
		<p>step 5 Fit the side panel into the installed channelling using silicone.</p>
		<p>step 6 Fit the return panel to the installed side panel. Depending on the enclosure stability and expectations a support bar is supplied which can be fitted as shown.</p>



Please note:

The Cove walk in enclosure fitting instructions are assuming all walls and floor and vertical / horizontal.

The Cove enclosure is reversible so that the return panel can be either left / right hand hung.

The Cove enclosure is designed for walk in applications and is not supplied with seals. The return panel is used as a water deflector only.

Due to the amount of various wall constructions and screw fixings available, no screws or screw fixings are supplied with this panel.

Adjustment for the Cove enclosure is determined within the wall channelling.

Use a good quality silicone for the securing the channels /panel. Silicone is not supplied.

It is recommended that the glass panels are moved and fitted using appropriate glass suction handles which should be available from good hardware stores.

Handy videos

Adjustment of hinges if required.

Scan the QR code for video instructions on hinge installation and adjustment.

