

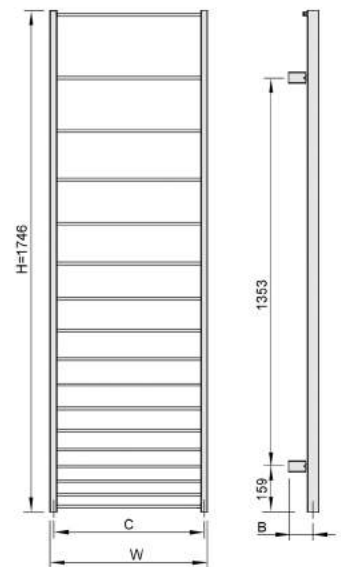
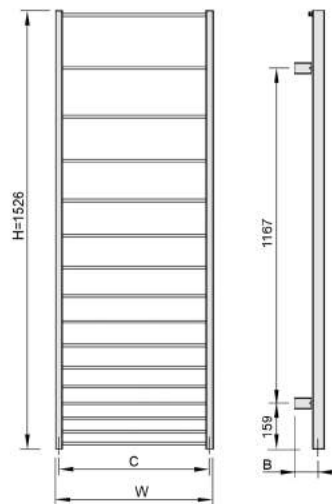
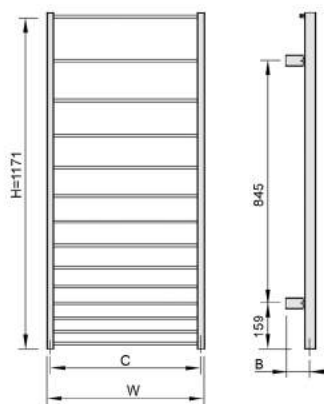


COLOUR HEATED MULTI RAIL TOWEL WARMER (163F)

DIMENSIONS IN MM

Width [mm]	Height [mm]	Depth from wall [mm]	Connections spacing [mm]	Connections distance from the wall [mm]	Brackets spacing [mm]	Heating surface [m ²]	Weight [kg]	Capacity [dm ³]	Power ΔT=50K (75/65/20 °C) [W]	Power ΔT=46K (75/65/24 °C) [W]	Power ΔT=30K (55/45/20 °C) [W]	Electric heater maximum power [W]
W	H	D	C	B	A							
450	879	100-105	425	80-85	425	0,58	7,3	2,3	324	292	171	300
450	1171	100-105	425	80-85	425	0,71	8,8	2,9	396	356	209	300
450	1526	100-105	425	80-85	425	0,86	10,6	3,7	480	432	253	300
450	1746	100-105	425	80-85	425	0,95	11,6	4,1	530	478	280	300
550	879	100-105	525	80-85	525	0,67	8,4	2,5	374	337	197	300
550	1171	100-105	525	80-85	525	0,82	10,1	3,2	458	413	242	300
550	1526	100-105	525	80-85	525	0,98	12,0	4,0	547	493	289	300
550	1746	100-105	525	80-85	525	1,07	13,1	4,4	597	538	315	300

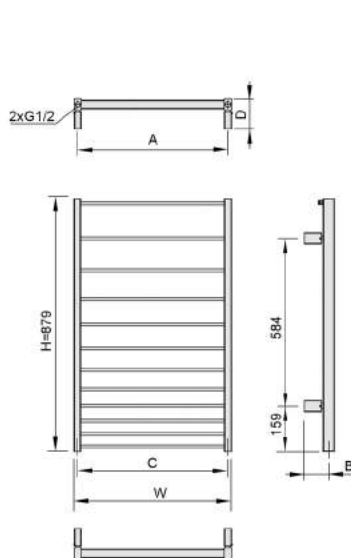

Finishing and warranty:	Nanoceramic (zirconia coating) + polyester-epoxy lacquer; 5 year warranty;	
Mounting brackets:	brackets in the colour of the radiator are included	
Valve:	order separately	
Heater :	order separately	
Working pressure:	8 bars	
Maximum temperature:	120 °C	
Connections:		- inner threads G 1/2 - air-vent plug G1/8 hidden behind
Accessories:	order separately	
Remarks:		

